


DAKOTA CERAMIC TILE



## DAKOTA CERAMIC TILE



12" x 12" DAKOTA IVORY FLOOR TILE  
44-000

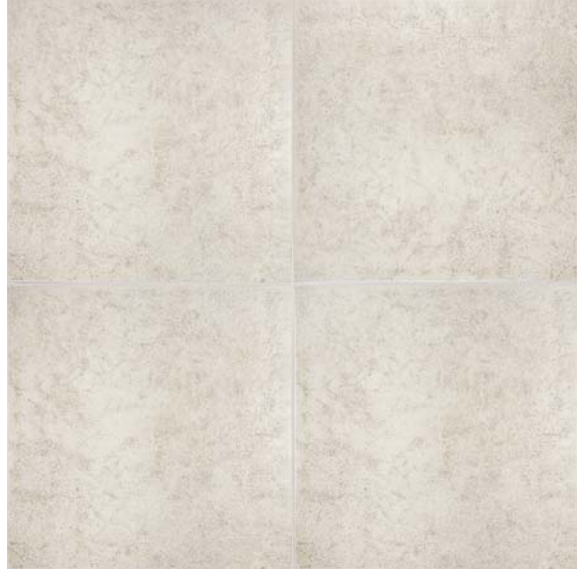

12" x 12" DAKOTA SAND FLOOR TILE  
44-001



12" x 12" DAKOTA BEIGE FLOOR TILE  
44-002



12" x 12" DAKOTA WALNUT FLOOR TILE  
44-003

## DAKOTA CERAMIC TILE

### PACKAGING INFORMATION

DESCRIPTION	ITEM CODE				LBS/BOX	PCS/BOX	SQFT/BOX	BOXES/SKID	SQFT/SKID
	IVORY	SAND	BEIGE	WALNUT					
13" x 13" DAKOTA FLOOR TILE	44-000	44-001	44-002	44-003	44.42	15	15	42	630.00

### GENERAL SPECIFICATIONS

DESCRIPTION	METHOD	UNIT	12" x 12"
THICKNESS		mm – in	7.8 mm – 5/16"
WATER ABSORPTION	EN ISO 10545-3	( % )	3 ≤ E ≤ 6
ABRASION RESISTANCE	EN ISO 10545-7	(PEI)	3
SCRATCH HARDNESS		(Mohs)	6
BREAKING STRENGTH	EN ISO 10545-4	(lbf)	162
CHEMICAL RESISTANCE	EN ISO 10545-13	(GL)	Class A – Resistant
FROST RESISTANCE	EN ISO 10545-12		Non Resistant
STATIC COEFFICIENT OF FRICTION (WET)	ASTM C-1028	(μ)	≥ 0.60
STATIC COEFFICIENT OF FRICTION (DRY)	ASTM C-1028	(μ)	≥ 0.80
DCOF (WET)	ANSI B101.3		≥ 0.70
SHADE VARIATION			V1